

Kvaser M12 Dsub9 Adapter 30 cm



EAN: 73-30130-01490-9





ABOUT

With a standard 9-pin Dsub at one end and a NMEA compatible 5-pin connector at the other, this 30 cm cable connects the Kvaser Leaf v3 or any CAN interface to equipment using the NMEA compatible connector, typically a marine electronics system. Kvaser's adapter cables have a high quality, ruggedised construction that meet the IP67 standard for water and dust ingress.

TECHNICAL AND MATERIAL DATA

| | |
|-----------------------------|---------------------------|
| # of can channels | 1 |
| Certifications | CE, RoHS |
| Connector | M12 5-pin A-code Dsub9 |
| Length | 300 mm |
| Operating Temperature Range | -40 °C to +85 °C |
| Strain Relief | Reinforced |
| Weight | 52 g |

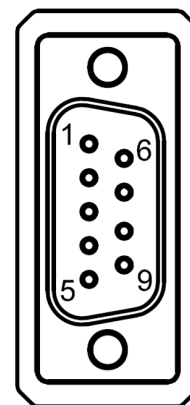

| 5-pos M12 | Signal Name | Dsub9 |
|-----------|-------------|---------|
| 3 | GND | 3 |
| 2 | V+ | 9 |
| 4 | CAN_H | 7 |
| 5 | CAN_L | 2 |
| 1 | SHIELD | 5+Shell |

Warranty

2-year warranty. See our General Conditions and Policies for details.

Support

Free support for all products by contacting support@kvaser.com.

Get in touch:  +46 31 886344

 sales@kvaser.com

 Kvaser AB, Sweden

© 2023 Kvaser. All rights reserved.
Ref. No: 98286-4 2023-08-25